

Sump Pump Battery Backup AC System

Patents Pending, Patent No. 8,591,198, 9.033,686 and 9,680,401







1/3 HP cast iron sump pump with automatic auxiliary AC power supply for primary-caliber pump backup when utility power becomes unavailable.



Can function as an everyday primary with continued pump service when power loss occurs or as a dedicated backup to an adjacent primary when inoperable.



Runs on AC power from utility supply or converted battery power reserved for emergency backup (one 12-volt Power+ AGM battery required, purchased separately).



Maintains full performance as pump continues to operate from either AC power source, with a steady pumping capacity rated at 44 GPM (*at 10' of head).




The Ion+ Switch with integrated high water alarm controls pump without moving parts. Detects high water in the sump pit and warns of elevated flood risk.






System Performance



Pump Performance




System Specifications

- 1/3 HP pump with PSC, energy efficient motor: 4.0 amps
- Up to 45 GPM
- Fully automatic, converts 12 volt DC to 120 volt AC when utility power is lost
- Runs 1/3 HP pump on AC or DC power
- Inverter has digital display, tells status of system at all times
- Requires one 12 volt deep cycle AGM battery (battery is NOT included)
- Non-corrosive battery enclosure

- Includes piggyback Ion+digital level control/alarm sensor with no moving parts
- Built-in alarm and monitoring system with Power, System and High Water LEDs and audible alarm
- Dry contacts to connect to a monitoring device via an RJ11 connection
- Quick and easy installation
- 3 year warranty

Typical Installation Components

- 1. Battery box with inverter
- 2. 1/3 HP WC33 sump pump
- 3. Ion+ digital level control/alarm sensor
- **4.** Recommended minimum basin size: 18" x 24" (not included)

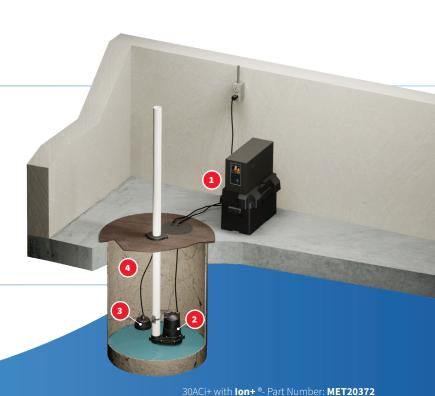

30ACi+ with Ion+ Connect® Cellular - Part Number: MET20487

30ACi+ with Ion+ Connect® WiFi - Part Number: MET20493