


230V CONNECTION DIAGRAM

TIGHTENING TORQUE FOR TERMINAL BLOCK IS 16 in-lbs.

INCOMING POWER CONNECTIONS

PUMP & FLOAT CONNECTIONS

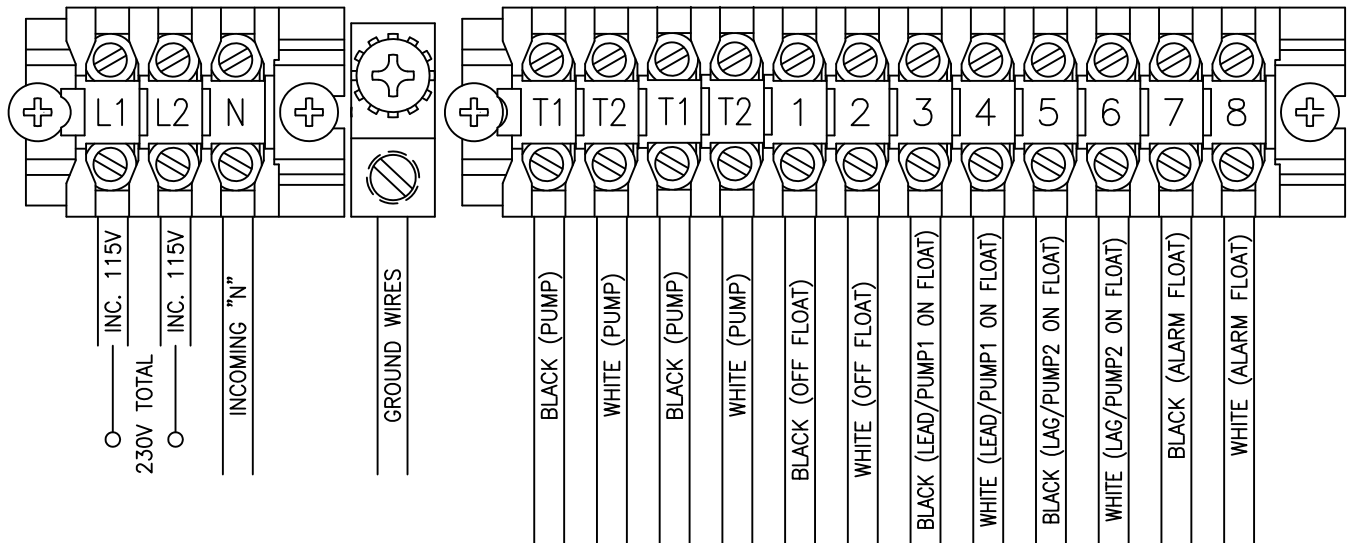

ALL INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY TO SEPTIC PRODUCTS INC.



CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS	C. BARRICK	05/28/09
E	.XXX = ±.005	MATERIAL SPECIFICATION: AS NOTED	
D	.XX = ±.010		
C	FRACTIONAL		
B	X/X = ±.1/64		
A	ANGLES X° = ±1/2°		


115/230V DUPLEX TERMINAL CONNECTIONS	
SCALE:	PART NO.
FULL	50A506

115V CONNECTION DIAGRAM

TIGHTENING TORQUE FOR TERMINAL BLOCK IS 16 in-lbs.

INCOMING POWER CONNECTIONS

PUMP & FLOAT CONNECTIONS

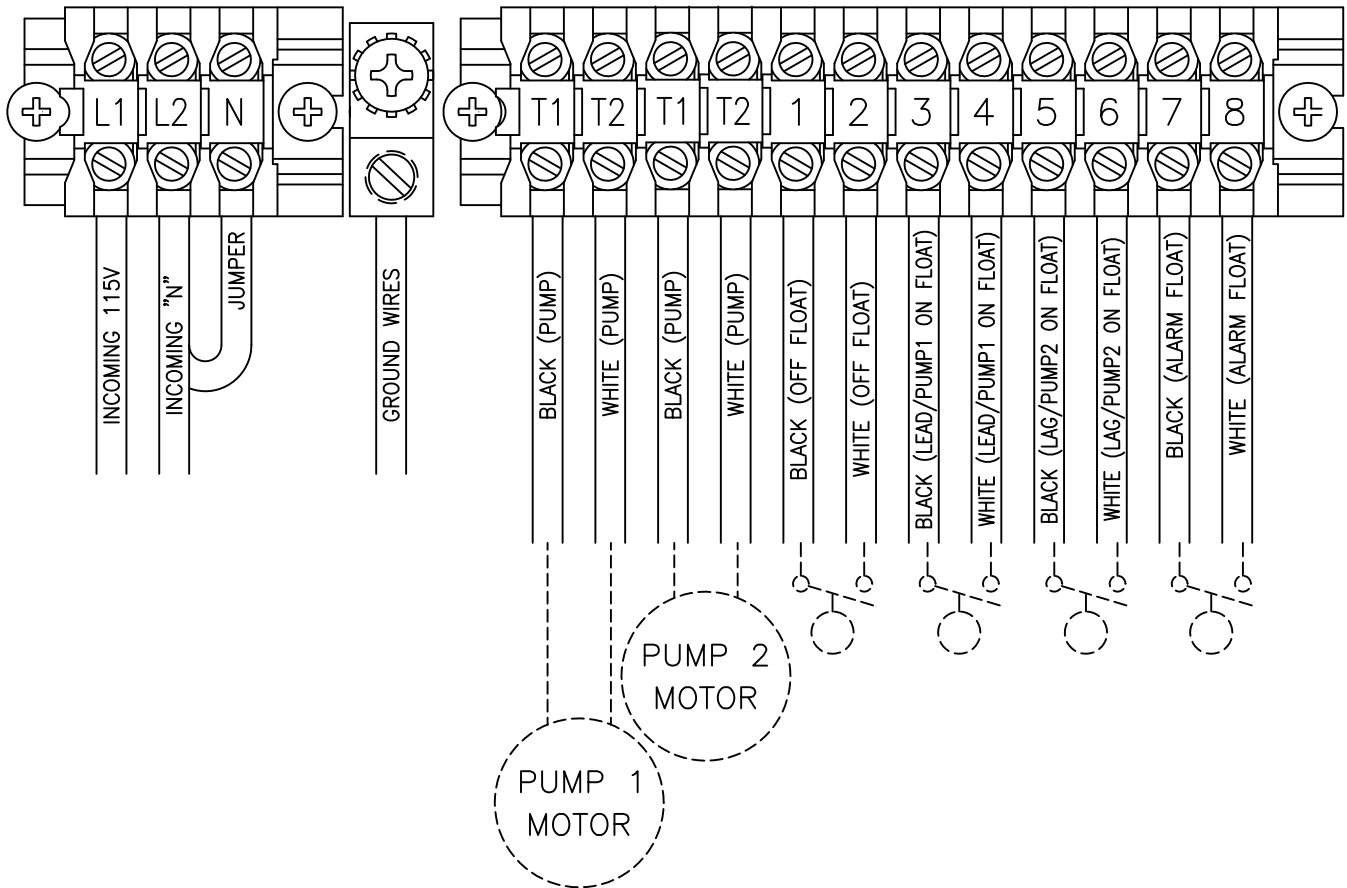

ALL INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY TO SEPTIC PRODUCTS INC.




CHANGES		TOLERANCES	DRAWN BY	DATE	115/230V DUPLEX TERMINAL CONNECTIONS	
F		DECIMALS .XXX = ±.005 .XX = ±.010 FRACTIONAL X/X = ±.1/64 ANGLES X° = ±1/2°	C. BARRICK	05/28/09		
E			MATERIAL SPECIFICATION: AS NOTED		FULL	50A506
D						
C						
B						
A						

CONNECTION DIAGRAM (3 FLOAT SYSTEM)

TIGHTENING TORQUE FOR TERMINAL BLOCK IS 16 in-lbs.

SEE PAGE 1 OR 2 FOR INCOMING POWER. CONNECT FLOATS AS SHOWN HERE.

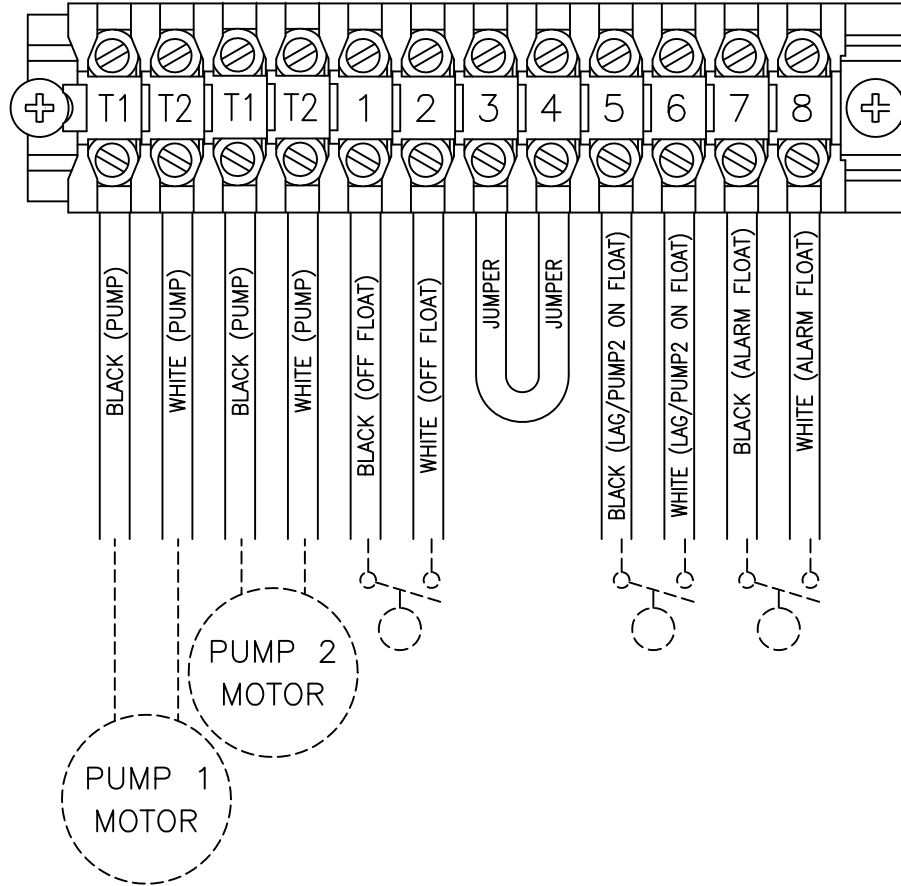


ALL INFORMATION CONTAINED IN THIS DRAWING IS
CONFIDENTIAL AND PROPRIETARY TO SEPTIC PRODUCTS INC.




CHANGES	TOLERANCES	DRAWN BY	DATE	115/230V DUPLEX TERMINAL CONNECTIONS	
F	DECIMALS .XXX = ±.005 .XX = ±.010 FRACTIONAL X/X = ±.1/64 ANGLES X° = ±1/2°	C. BARRICK	05/28/09	SCALE:	PART NO.
E		MATERIAL SPECIFICATION: AS NOTED		FULL	50A506
D					
C					
B					
A					

POWER CIRCUIT
115/230V - 1PH

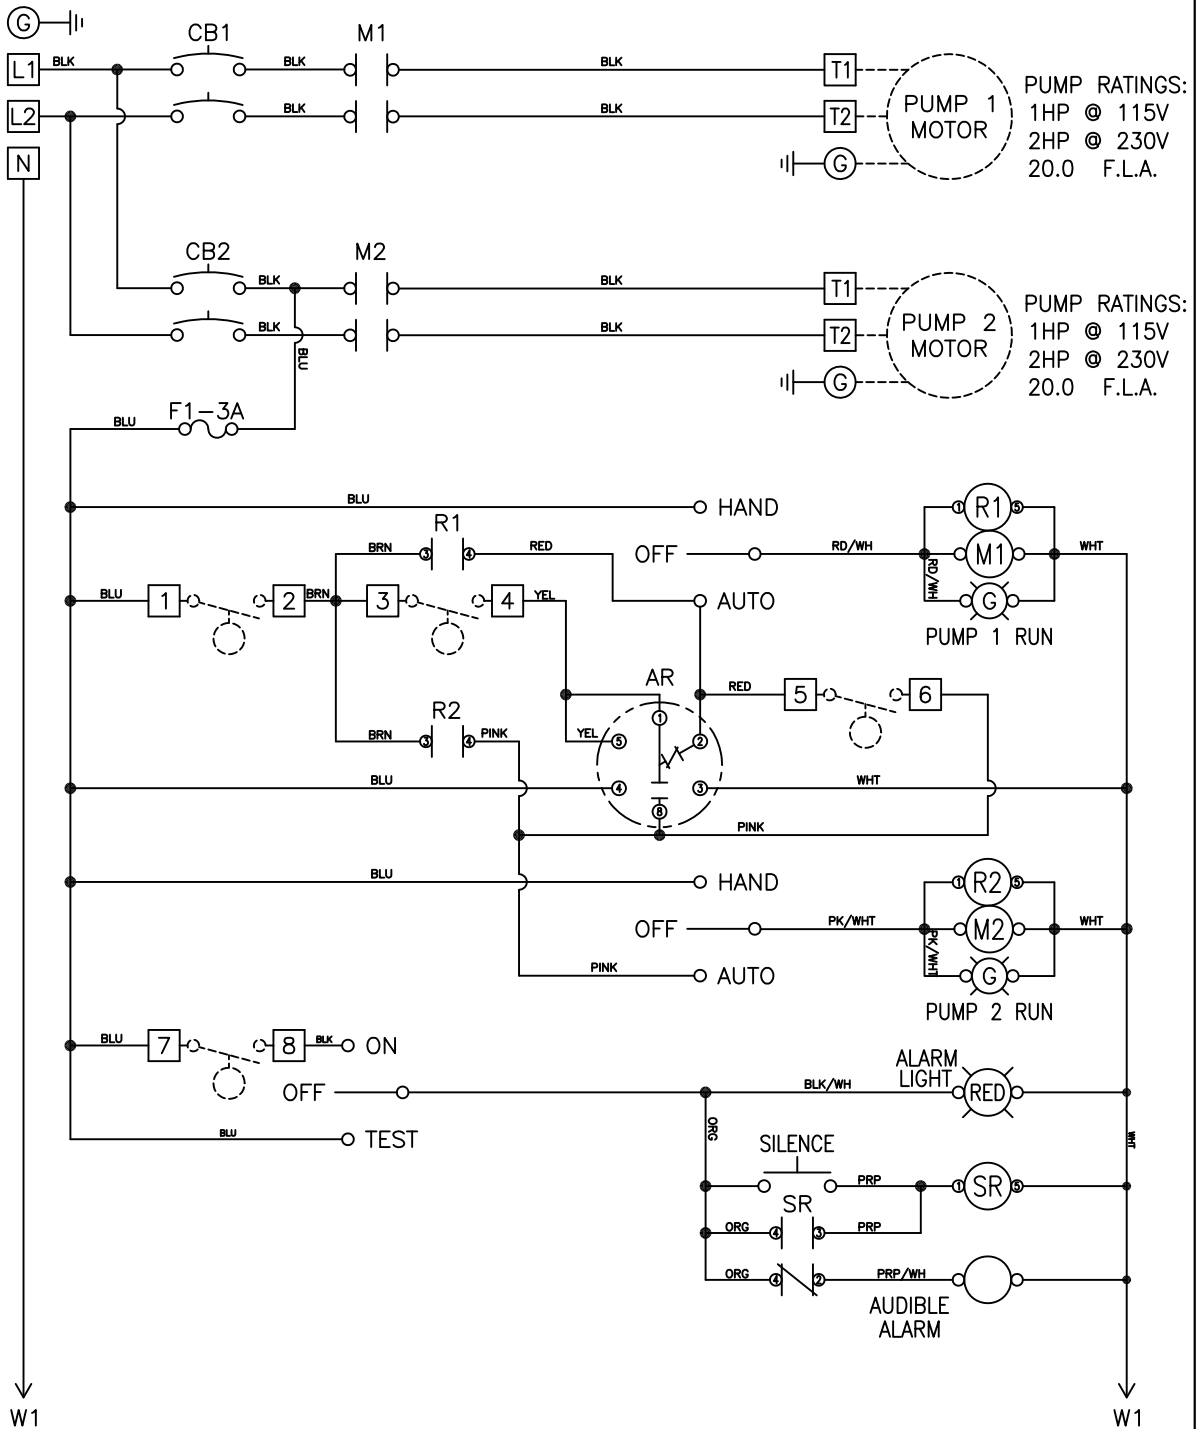

NOTES: FLOAT SWITCH TO BE RATED 2 AMP AT 120V MINIMUM.
MAIN PANEL DISCONNECT MUST BE PROVIDED BY INSTALLER.
DASHED LINES INDICATE ITEMS NOT CONTAIN IN THE PANEL.
FIELD WIRING MUST BE A MINIMUM OF 60°C COPPER WIRE.



SEPTIC PRODUCTS INC

SCHEMATIC, ELECTRICAL	
SCALE:	PART NO.
FULL	50A506

CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .xxx = ±.005 .xx = ±.010	C. BARRICK	10/05/16
E	FRACTIONAL x/x = ±.1/64 ANGLES x' = ±1/2'	MATERIAL SPECIFICATION:	
D		AS NOTED	
C			
B			
A			