

Ion® SHV40i+

Sewage Pump With Built-In High Water Alarm



Pump Features

- Septic tank effluent
- Light Commercial sewage
- Residential sewage
- High-capacity sump
- Carbon ceramic mechanical seal
- Automatic reset thermal overload for maximum protection
- Lower single-row ball-bearing construction
- • Ion+® digital level control piggyback switch with alarm has no moving parts (standard)
- 3 year residential warranty

System Specifications

Typical Applications

- Light commercial sewage
- Residential sewage
- High-capacity sump
- Septic tank effluent

Maximum Capacity Up to 90 GPM

Maximum Head Up to 25'

Electrical Data 115 V, 1 Ø, 8.5 FLA, 60 Hz

Motor Data 1/2 HP, 3450 RPM

Intermittent Liquid Temperature 130° F

Recommended Minimum Basin Size 18" x 30"

Automatic Operation i: Ion+ (standard)

Materials of Construction Cast iron and stainless steel


Impeller Cast iron vortex

Power Cord 20' Standard

Discharge 2" NPT

Solids Handling 2"

Pump Performance

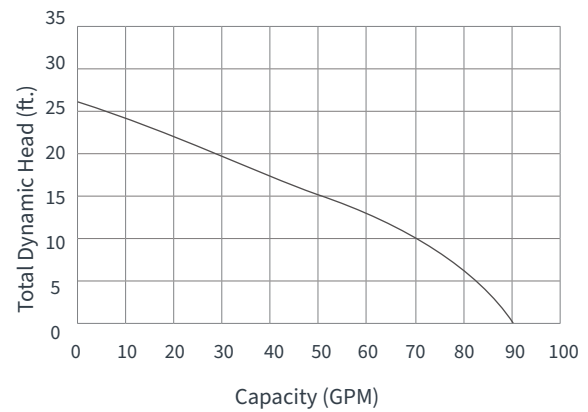

Pump Dimensions

