

Ion® WC33+

Sump Pump with Built-In High Water Alarm



1/3
HP

1/3 HP submersible sump pump with the versatility for pumping ground, surface, or effluent water with up to 1/2" solids.



Cast iron housing provides solid protection from wear and tear during routine or excessive use.

44
GPM*

Rated at 44 GPM of pumping capacity (*at 10' of head), providing dependable use for basement sump, septic tank effluent, or dewatering applications.



Integrated high water alarm with the included Ion+ Switch. Controls pump without moving parts or contact points and warns of elevated flood risk when detecting high water level.



High efficiency motor with thermal overload protection as an additional safeguard in the event of overheating. Runs quietly and preserves energy.

System Specifications

Typical Applications

- Basement sump
- Dewatering
- Septic tank effluent

Maximum Capacity Up to 45 GPM

Maximum Head Up to 24'

Electrical Data 115 V, 1 Ø, 4 FLA, 60 Hz

Motor Data 1/3 HP, 3450 RPM

Recommended Minimum Basin Size 18" x 24"

Automatic Operation i+: Ion+ (standard)


Materials of Construction Cast iron & engineered thermoplastic

Power Cord 10' Standard

Discharge 1 1/2" NPT

Solids 1 1/2"

Pump Performance

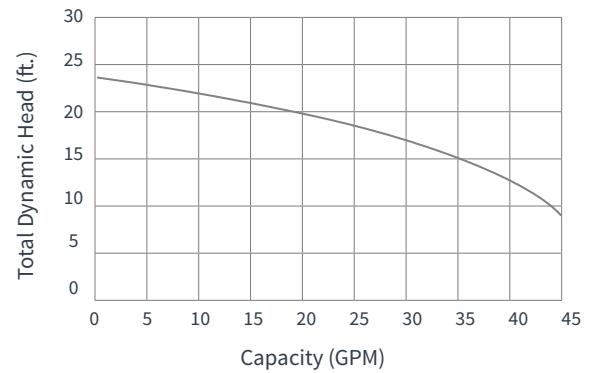

Pump Dimensions

